




START **1** Jumpwire - Draadbrug - Pontage



◇ J1 ... J5

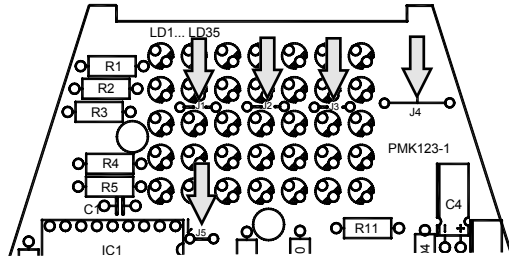

2 Resistor - Weerstand - Résistance - Widerstand - Resistencia - Motstand - Vastus - Resistenze



◇ R1... R6: 330 Ohm

◇ R7, R8: 10K

◇ R9... R11: 0 ohm

(Orange, Orange, Brown) - (Oranje, Oranje, Bruin) - (Orange, Orange, Brun) - (Orange, Orange, Braun) - (Orange, Orange, Brun) - (Oranssi, Oranssi, Ruskea) - (Naranjado, Naranjado, Marrón) - (Laranja, Laranja, Castanho) - (Aranciato, Aranciato, Marrone)


(Brown, Black, Orange) - (Bruin, Zwart, Oranje) - (Brun, noir, Orange) - (Braun, Schwarz, Orange) - (Brun, Svart, Orange) - (Ruskea, Musta, Oranssi) - (Marrón, Negro, Naranjado) - (Castanho, Preto, Laranja) - (Marrone, Nero, Aranciato)

(Black) - (zwart) - (noir) - (Schwarz) - (Svart) - (Musta) - (Negro) - (Preto) - (Nero)




3 Diode

Watch the polarity!
Attention à la polarité!



◇ D1 ... D4 : 1N4148

4 CAPACITOR




◇ C1 : 100nF (104)

◇ C2 : 22pF


◇ C3 : 5pF (3p ... 6p)

5 QUARTZ CRISTAL



◇ X1 : 4,194304

6 ELECTROLYTIC CAPACITORS



Watch the polarity!
Att. À la polarité!

◇ C4, C5 : 4,7µF

7 LED

Watch the polarity!
Att. la polarité!

◇ LD1... LD35

8 VOLTAGE REGULATOR

◇ VR1: 78L05

9 TRIM CAPACITOR

◇ CV1: 3-10pF

CLOCK ADJUST:

10 PUSH BUTTON

◇ SW1 : set
◇ SW2 : select

11 SOCKET + IC

◇ IC1: VMK123
(Programmed PIC16C54)


12 POWER JACK

solder side! - soldeerzijde! - côté soudure! - Lötseite! - lado soldadura! - lödsida - bisogna saldare! - loddesident! - juotospuolelle! - lado da soldadura.

◇ SK1

Solder - Solderen - Soudage - Löten - Soldadura - Lödning - Juottaminen - Saldatura - Solda

13 BATTERY HOLDER

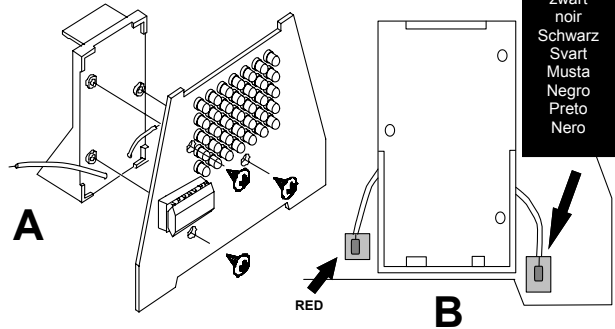

14 DISPLAY

GLUE