

DIN-Rail 1-10V LED Dimming Driver

0-144...288W 12A 12-24Vdc

- Dimming interface: 0-10V, 1-10V, 10V PWM or push button
- PWM digital dimming, no alter LED color rendering index.
- Dimming range from 0-100%, LED start at 0.1% possible.
- Max. current output: 12A.
- Short circuit / Over load protection.
- Full protective plastic housing.
- Suitable for indoor environments.



FC CE RoHS



warranty
5 years

Main Characteristics

Dimming Interface: 0-10V, 1-10V, 10V PWM or push button
 Input Voltage: 12-24Vdc
 Output Voltage: 12-24Vdc
 Output Current: 12A×1CH
 Max. Output Power: 0-144W...288W
 Dimming Range: 0-100%, LED start at 0.1% possible.


Mounting: DIN-Rail or Screw
 Working Temperature: -30°C-55°C
 Product Size: L112×W35×H67(mm)
 Package Size: L114×W37×H70(mm)
 Weight(G.W.): 125g


Dimensions




DIN-Rail mounting size:
TS-35/7.5 or TS-35/15

System Connection Diagram:

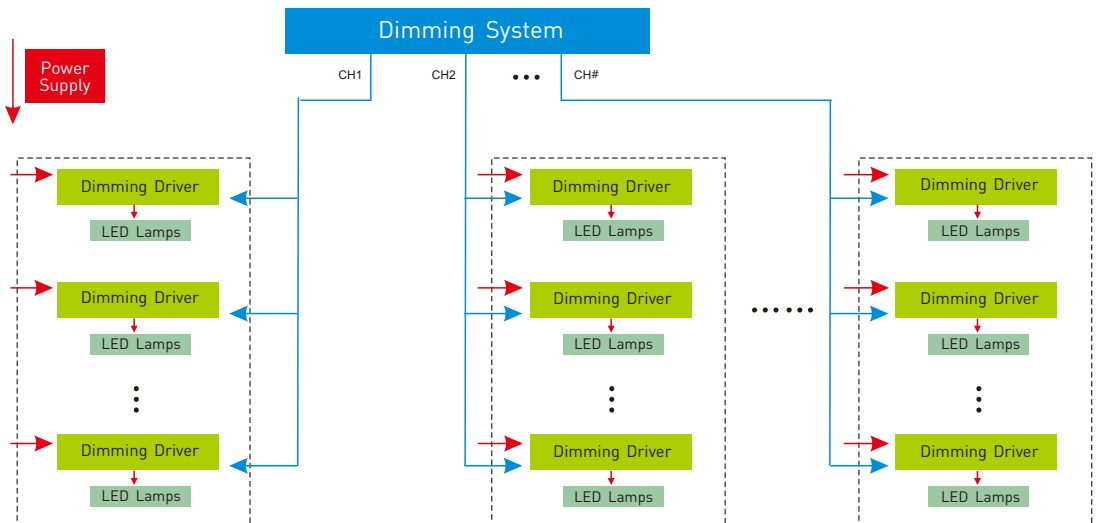

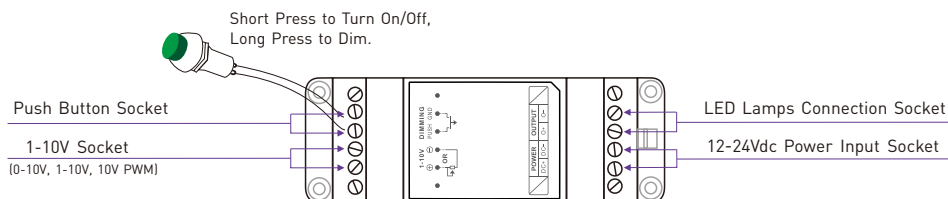

12V lamp connected, loads 0~144W(12V).

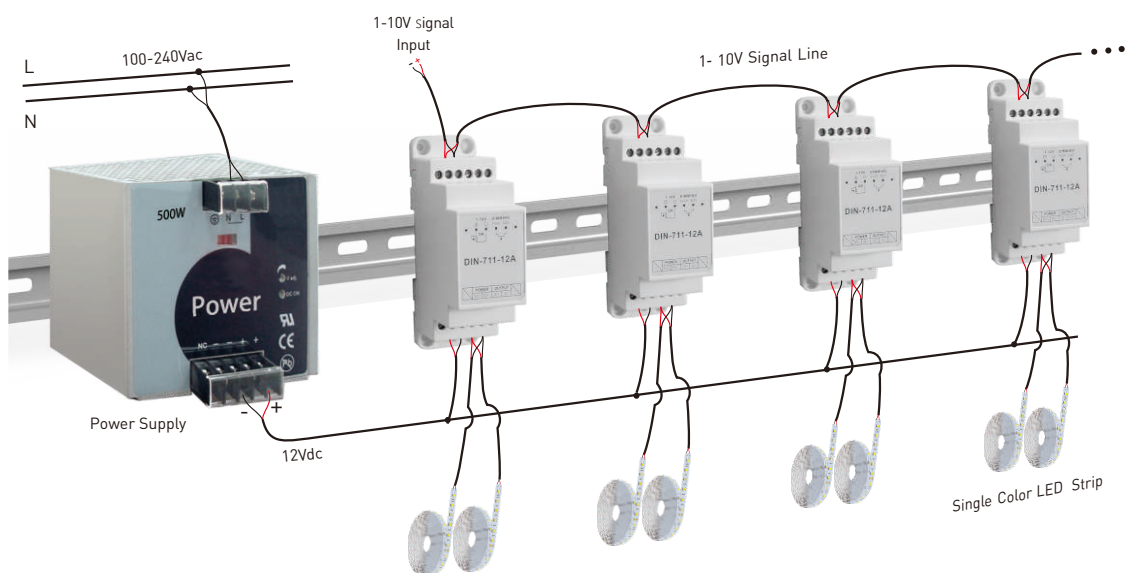

24V lamp connected, loads 0~288W(24V).

