





VM119 One channel dual output receiver (for use with our VM118R transmitter)


Using multiple receivers of this type in combination with our 8 channel transmitter, will allow you to control remotely up to 8 devices at different places.
e.g. Perfectly suited for hide-away control situations, for demonstrations, home use...



LED status indicators

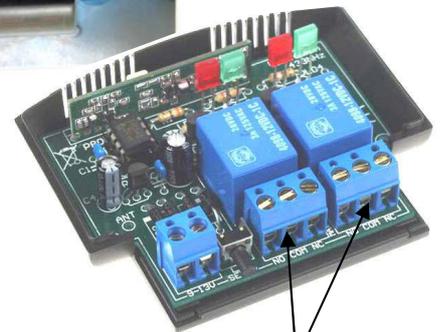

Unique Feature:
Dual output

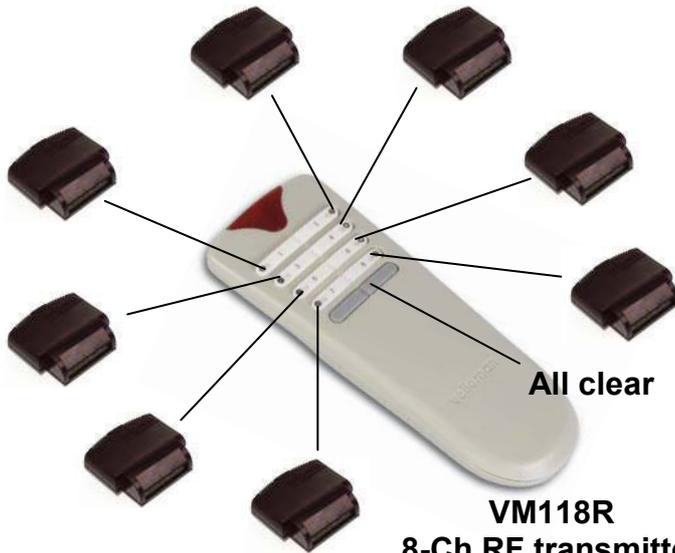

All clear

VM118R
8-Ch RF transmitter

A single transmitter key-press activates two independent outputs.
Each output can be configured as toggle, pulse or pulse with timer.
This allows you to e.g. Start two different timers, have a pulsed and a timed output, have two galvanically separated outputs, etc

Specifications:

- For use with VM118R (or K8058 kit) RF transmitters.
- Relay contacts NO / NC: 3A max. each.
- 433MHz operation.
- Selectable timers per output: 0.5s, 5s, 30s, 1min, 5min, 15min, 30min and 60min
- Open field range of up to 30m possible.
- Power supply : 9 to 12V AC or DC / 100mA max.
- Dimensions : 80x70x25mm.

More features:

- Easy setup and transmitter 'learning', no jumper settings
- Toggle or pulse function selectable per output
- Pulse function can have turn off timer
- Up to 31 different VM118R transmitters or transmitter buttons can be stored
- 'All clear'-function
- LED indicators for outputs and functions



Easy fixation