
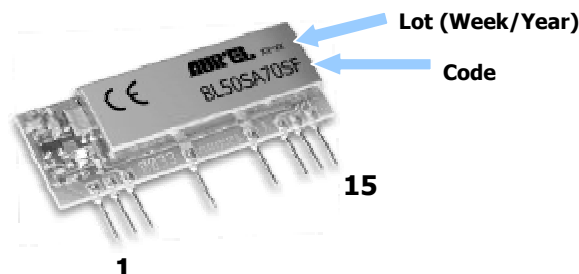


RX-8L50SA70SF Receiver

RF superheterodyne digital data receiver, OOK (On-Off Keying) modulated, operating at the 868,3MHz frequency, with high sensitivity, selectivity and immunity to electromagnete interfering fields.

Pin-out

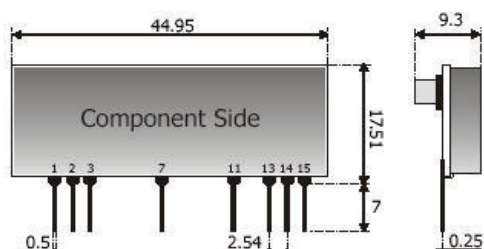

Connections

Pin 1	+V Preamp.	Connection to the +5V $\pm 5\%$ supply positive pole
Pin 2-7-11	Ground	GND Connections: Internally connected to a single ground plate
Pin 3	Antenna	50 Ω impedance antenna connection
Pin 13	Test Point	Analog output of the demodulated signal. By connecting an oscillograph the entity and quality of the received RF signal can be seen.
Pin 14	Data Out.	Receiver digital output. Apply loads over 10 K Ω
Pin 15	+V	Connection to the +5V $\pm 5\%$ supply positive pole

Technical features

	Min	Typical	Max	Unity	Remarks
Working centre frequency		868.3		MHz	
Voltage supply Vs	4.75	5	5.25	V	
Absorbed current		7	9	mA	
RF sensitivity	-98	-100	-104	dBm	See note 1
RF passband at -3dB		600		KHz	
IF passband at -3dB		300		KHz	
Output square wave			3	KHz	
Output high logic level	Vs-1.2			V	See note 4
Output high logic level			Gnd	V	See note 4
RF spurious emissions in antenna			-80	dBm	See note 2
Switch-on time			0.2	s	See note 3
Working temperature	-20		+80	°C	See Fig.4
Dimensions	44.95 x 17.51 x 9.3 mm				

Note1: Values have been obtained by applying the test system as per Fig. 1.

Note2: The RF emission measure has been obtained by connecting the spectrum analyser directly to RX Pin 3.

Note3: By switch-on time is meant the time required by the receiver to acquire the declared characteristics from the very moment the power supply is applied.


Note4: Values obtained with 10K Ω maximum load applied.

The technical tests and reports have been carried out and obtained by the laboratories of :
Messrs PRIMA RICERCA & SVILUPPO – via Campagna, 58 – 22020 Gaggino Faloppio (CO) - Italy

The technical features are subject to change without notice. AUREL S.p.A. does not assume responsibilities for any damages caused by the device's misuse

The declared technical features have been verified by applying the following test system:

Fig. 1

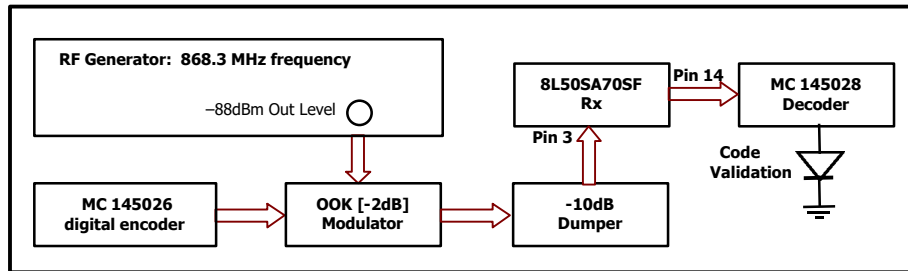

Device usage

In order to take advantage of the performances described in the technical specifications and to comply with the operating conditions which characterize the Certification, the receiver has to be fitted on a printed circuit, considering what follows:


5 V dc supply:

1. The receiver must be supplied by a very low voltage source, safety protected against short circuits.
2. Maximum voltage variations allowed: $\pm 0,25$ V.
3. De-coupling, next to the receiver, by means of a minimum 100.000 pF. ceramic capacitor.

Ground:

1. It must surround at the best the welded area of the receiver. The circuit must be double layer, with throughout vias to the ground planes, approximately each 15 mm.
2. It must be properly dimensioned, specially in the antenna connection area, in case a radiating whip antenna is fitted in it (an area of approximately 50 mm radius is suggested.)

Fig.2 Suggested lay-out for the device correct usage

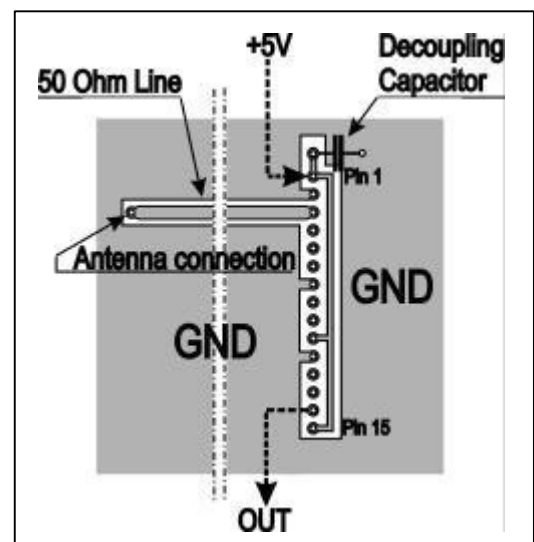

The technical features are subject to change without notice. AUREL S.p.A. does not assume responsibilities for any damages caused by the device's misuse.

50 Ohm line:

1. It must be the shortest as possible.
2. 1,8 mm wide for 1 mm thick FR4 printed circuits and 2,9 mm wide for 1,6 mm thick FR4 printed circuits. On the same side, it must be kept 2 mm away from the ground circuit.
3. On the opposite side a ground circuit area must be present.

Antenna connection:

1. It may be utilized as the direct connection point for the radiating whip antenna.
2. It can bear the connection of the central wire of a 50 Ω coaxial cable. Be sure that the braid is welded to the ground in a close point.

Antenna

1. A **whip** antenna, 8,5 mm long and approximately 1 mm dia, brass or copper wire made, must be connected to the RF input of the receiver.
2. The antenna body must be kept straight as much as possible and it must be free from other circuits or metal parts (5 cm minimum suggested distance.)
3. It can be utilized either vertical or horizontal, provided the connection point between antenna and receiver input, is surrounded by a good ground plane.

Other components:


1. Keep the receiver separate from all other components of the circuit (more than 5 mm).
2. Keep particularly far away and shielded all microprocessors and their clock circuits.
3. Do not fit components around the 50 Ohm line. At least keep them at 5 mm distance.
4. If the Antenna Connection is directly used for a radiating whip antenna connection, keep at least a 5 cm radius free area. In case of coaxial cable connection then 5 mm radius will suffice.

Reference Rules


The **RX-8L50SA70SF** receiver is EC certified and in particular it complies with the European Rules **EN 300 220-3** for class 2, and **EN 300 683** for class 1. The equipment has been tested according to **rule EN 60950** and it can be utilized inside a special insulated housing that assures the compliance with the above mentioned rule. The receiver must be supplied by a very low voltage safety source protected against short circuits. The use of the receiver module is foreseen inside housings that assure the overcoming of the rule **EN 61000-4-2** not directly applicable to the module itself. In particular, it is at the user's care the insulation of the external antenna connection, and of the antenna itself since the RF output of the receiver is not built to directly bear the electrostatic charges foreseen by the a.m. rule.

The technical features are subject to change without notice. AUREL S.p.A. does not assume responsibilities for any damages caused by the device's misuse.

Reference curves

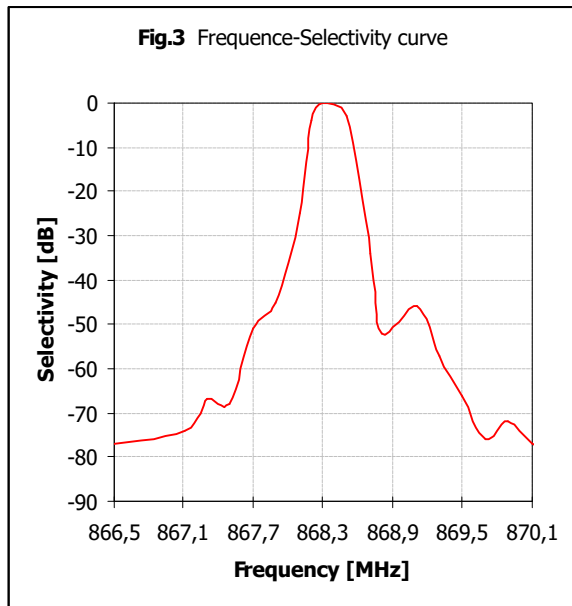

The curve has been obtained by the test system shown in Fig.1.

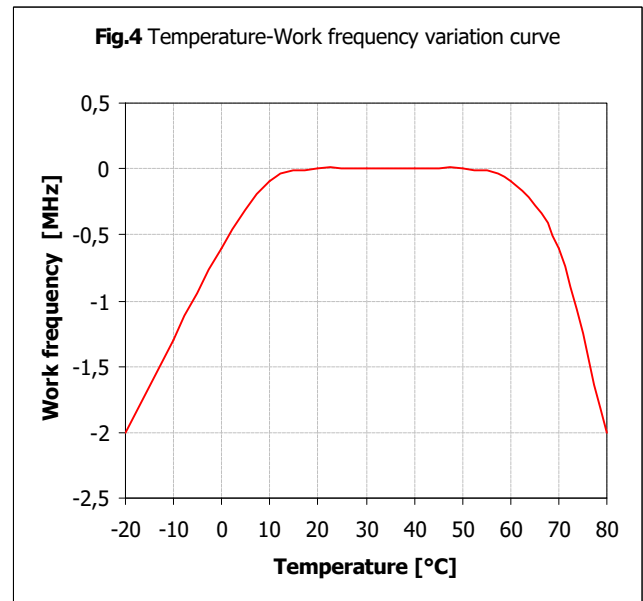

5V supply, RF 868,3 MHz, -100dBm input