

# I.D.C. SOCKET 2.54mm (0.100")

## Specifications:

**Contact Resistance:** 30mΩmax.at DC 100mA

**Insulator Resistance:** 1000MΩmin.at DC 500V

**Current Rating:** 1 AMP












## Dielectric Withstanding

**Voltage:** AC 500V For 1 minute

**Operating Temperature:** -55°C ∞ +105°C

**Contact:** Phosphor Bronze

**Housing:** PBT & 30% Glass Fiber (UL 94V-O)

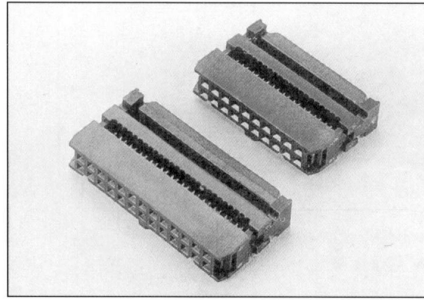

## Dimension

Position	Dimension	
	A	B
10	17.27	10.16
14	22.35	15.24
16	24.89	17.78
20	29.97	22.86
24	35.05	27.94
26	37.59	30.48
30	42.67	25.56
34	47.75	40.64
40	55.37	48.26
50	68.07	60.96
60	80.77	73.66
64	85.85	78.74