

# D-SUB I.D.C. TYPE


## Specifications:

**Contact Resistance:** 30mΩmax.at DC 100mA  
**Insulator Resistance:** 1000MΩmin.at DC 500V  
**Current Rating:** 1 AMP


## Dielectric Withstanding

**Voltage:** AC 500V For 1 minute  
**Operating Temperature:** -55°C ~ +105°C








**Contact :** MALE Brass  
 FEMALE Phosphor Bronze  
**Housing:** PBT & 30% Glass Fiber (UL 94V-O)

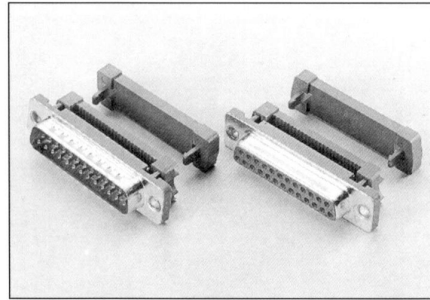

## MALE

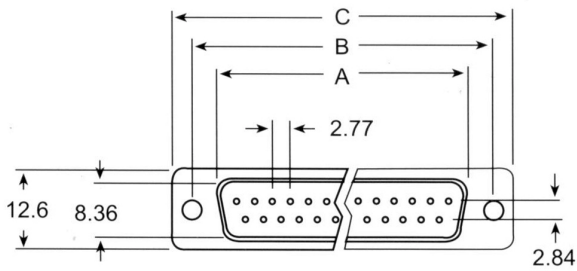

## FEMALE

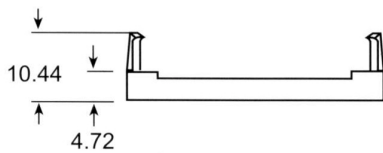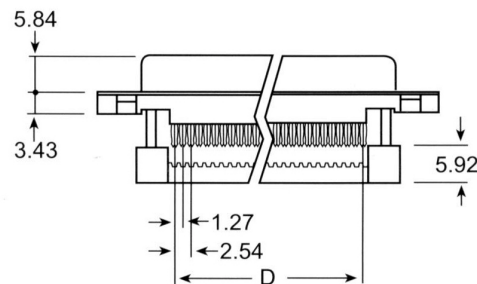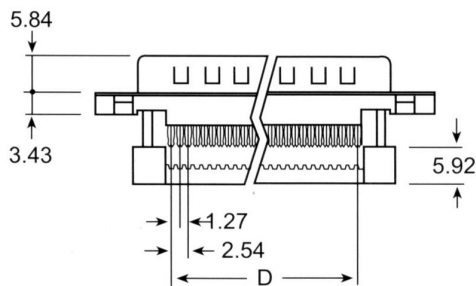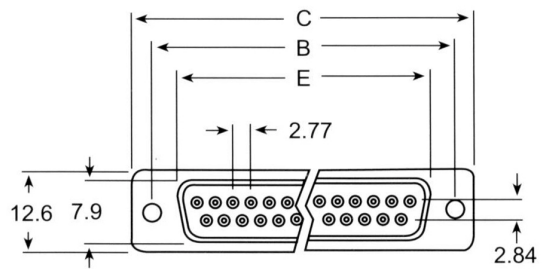

## Dimension

Position	A	B	C	D	E
9	16.92	25.00	30.80	10.16	16.30
15	25.25	33.32	39.10	17.78	24.50
25	38.96	47.04	53.10	30.48	38.30
37	55.45	63.50	69.50	45.72	54.80