


PIN HEADER 2.54mm (0.100")

Specifications:




Contact Resistance: 30mΩmax.at DC 100mA
 Insulator Resistance: 1000MΩmin.at DC 500V
 Current Rating: 1 AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass
 Housing: PBT & 30% Glass Fiber (UL 94V-O)

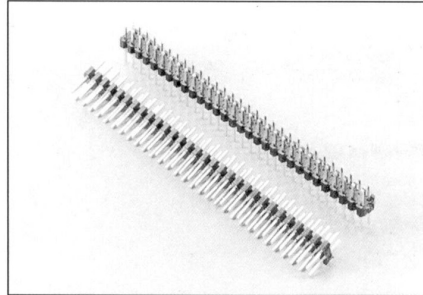

Single Row

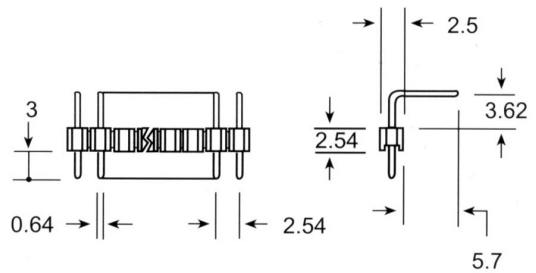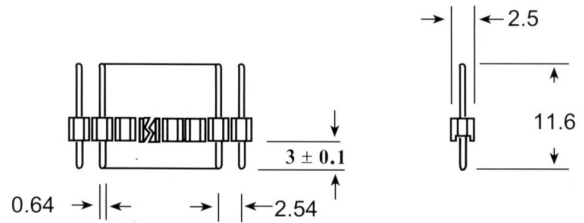

Position	2 Thru 40
Dimension	4 Thru 80
A	2.54*Position No.
B	2.54*Position No.-2.54