B162B (16 chracters x2 Lines) 1/16DUTY, 1/5BIAS

1.DIMENSION OUTLINE

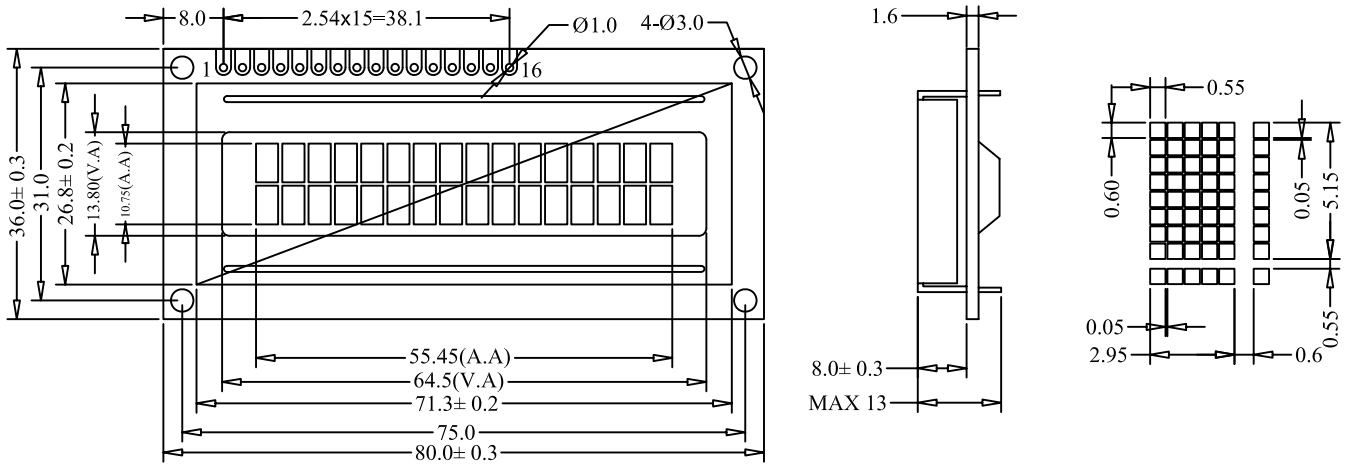

2.MECHANICAL SPECIFICATIONS

ITEM	SPECIFICATIONS	ITEM	REMARK
Modeule Size(L×W×H)	80.0×36.0×13.0	mm	Reference Dimensional Outline
View Area(W×H)	64.5×13.8	mm	
Effective V/Area	55.45×10.75	mm	
Number of Characters	16CH×2Lines	-	
Character Size(W×H)	2.95×5.15	mm	
Dot Size(W×H)	0.55×0.60	mm	
Weight(Reflective/Led)	-	g	

3.ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	CONDITION	STANDARD	
			MIN	MAX
Logic Voltage	V_{DD}	Ta=25℃	-0.3V	7V
LCD Voltage	V_{LCD}		-0.3V	13V
Input Voltage	V_I		-0.3V	V_{DD}+0.3V
Operation Temperature	T_{OP}	—	-20℃	70℃
Storage Temperature	V_{OP}	—	-30℃	80℃

4.BLOCK DIAGRAMMECHANICAL

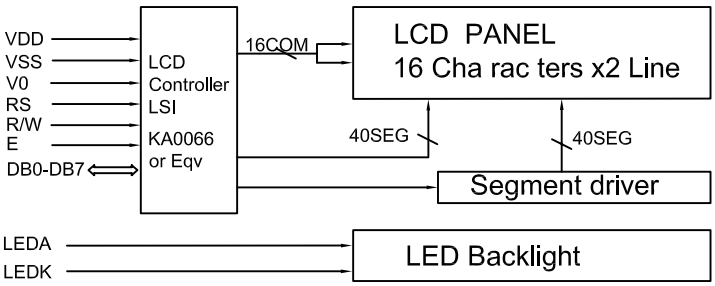

5.LED BACKLIGHT SPECIFICATIONS

ITEM	SYMBOL	TYPE	MAX	UNIT
Ta=25℃				
Forward Voltage	V_f	4.1	4.3	V
Forward Current	I_f	120	—	mA
Emission Vave Length	λ_P	568	—	nm

6.INTERFACE PIN CONNECTIONS

ITEM	SYMBOL	LEVEL	FUNCTIONS
1	VSS	0V	Power Ground
2	VDD	+5V	Power supply for logic
3	V0	—	Contrast adjust
4	RS	H/L	H:data L:command
5	R/W	H/L	H:read L:write
6	E	H.H→L	Enable signal
7-14	DB0-DB7	H/L	Data Bus
15	LEDA	+5V	Power supply for LED Backlight
16	LEDK	0V	

7.ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	MIN	TYPE	MAX	UNIT
Ta=25℃					
Logic Power	V_{DD}	4.5	5	5.5	V
Input High Voltage	V_{IH}	2.2	—	V_{DD}	V
Input Low Voltage	V_{IL}	-0.3	—	0.6	V
Output High Voltage	V_{OH}	2.4	—	V_{DD}	V
Output Low Voltage	V_{OL}	0	—	0.4	V
Logic Current	I_{DD}	—	1.5	3.0	mA
Operation Voltage For LCD	V_0-G_{ND}	—	5	—	V